

## 188 - BRIGHT SPOT SERIES

The standard for radiology departments nationwide! These superior high intensity illuminators with *variable intensity illumination*, *rheostat foot switch controls* and *swivel base*. A best seller! A unique, low cost, bright spot illuminator series for viewing dense film.

**188:** The Bright Spot lamp housing adjusts for easy viewing, the base has key holes for wall mounting and plastic non-marring feet to stand on a desk.


**188SM:** A 188 with a special bracket that permits attachment to either side of a non-recessed illuminator and swivels in any direction.

Both the 188 and the 188SM come with a rheostat foot switch to vary the brightness of the special high intensity bulb which is surrounded by a polished aluminum reflector.

**EXTERIOR DIMENSIONS:** 6" Wide 7.5" High 6.75" Deep  
 approx. shipping weight 9 lbs.

**Finish:** Light gray baked enamel (on cold rolled steel).

**Electrical:** Viewers operate on 120 volt, 60 Hz, .7 Amps AC. Supplied with a 6' three conductor line cord. For special voltages consult factory.

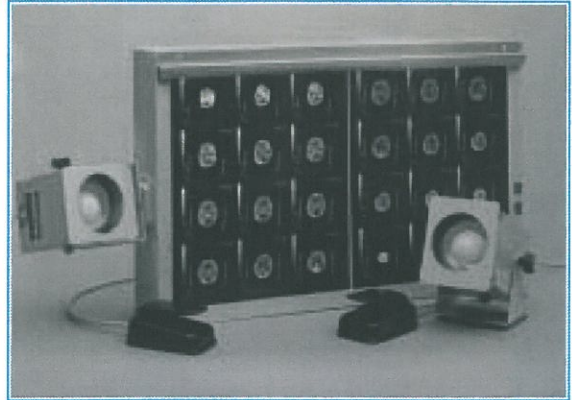

188SM- Side Mount Bright Spot mounted on a 222 - 188- Bright Spot on desk

## 183 MINI BRIGHT SPOT

A foot switch is provided for ease of mobility. **DISCONTINUED** The Mini Bright Spot is a compact, portable illuminator. The Mini Bright Spot is provided with a foot switch for ease of mobility.

**EXTERIOR DIMENSIONS:** 5.5" Wide 10" High 8.5" Deep  
 approx. shipping weight 18 lbs.


**Finish:** Light Grey baked enamel (on cold rolled steel)

**Electrical:** Viewers operate on 120 volt, 60 Hz, .1 Amp AC. Supplied with a 6' three conductor line cord. For special voltages consult factory.



## COOLBRITE SERIES

The CoolBrite is a unique high intensity illuminator designed for viewing dense film areas. Using a specially designed lamp and electronics, the CoolBrite produces very high luminance, 18,000 cd/m<sup>2</sup> (candela per sq. meter) without the undesirable heat that is characteristic of incandescent "hot lights". Measuring 8" wide, 13" long and 2.75" high these illuminators are extremely portable and can be placed on a desktop, mounted on a wall, or attached to an articulated instrument-mounting arm for optimum convenience. Both foot switch and film activated switches are standard. There is a built in automatic shut off to protect viewer and film.



### CB-4

#### HIGH INTENSITY WITH ADJUSTABLE IRIS

Luminance: Approx. 18,000 cd/m<sup>2</sup>  
 Aperture: 0.7"-4.4" Diameter  
 Power: 117 VAC ± 10%, 50/60 Hz, .75 amp  
 Weight: 5.2 Lbs.

### CB-3

#### HIGH INTENSITY

Luminance: Approx. 18,000 cd/m<sup>2</sup>  
 Aperture: 4.4" Diameter  
 Power: 117 VAC ± 10%, 50/60 Hz, .75 amp  
 Weight: 4.88 Lbs.

**EXTERIOR DIMENSIONS:**  
 8" Wide 13" Long 2.75" High