

- RIBBED CONSTRUCTION**
- DESIGN VERSATILITY**
- ECONOMICAL**
- ALL STEEL AND LEAD CONSTRUCTION**
- CHOICE OF WINDOW SIZES**

Extremely versatile design makes it possible to adapt these panels for use in virtually every X-Ray installation. These exclusive S&S Ribbed Protectopanel® offer maximum economy. The unique designs of the panels and couplings are protected by U.S. Patents.

Joints and corners are quickly made with the patented overlapping double leaded "H" connectors. Installation is easy; after the floor channels and optional wall brace (559L) are set in place the panels and couplings are inserted and the entire assembly is enclosed by the top channel. Only the floor and top channels are custom made for the job.

Panels are available in five different widths all 84" tall, 7/8" thick. An optional 8"x10" or 10"x12" lead glass window (1.7mm lead equivalency) is available for panels 24" or wider. The window is centered in the panel with its center 60" above the floor. A lead liner of 1/16" (1.55mm) minimum thickness is centered between the two steel walls of our unique ribbed design for strength and rigidity.


Finish: Light gray baked enamel

TO ORDER:

Provide a rough floor plan sketch including overall layout, location of optional window if desired, angles and sizes of panels and attach to order. *We will assume that outside measurements are used unless otherwise specified.*



Sample of Possible Floor plans

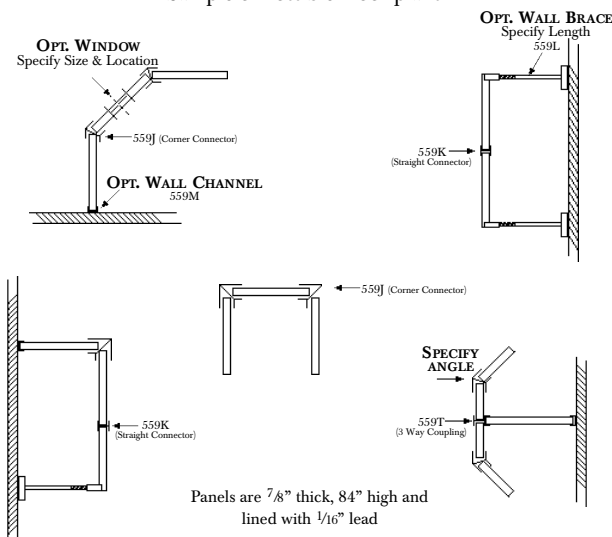

RIBBED PROTECTOPANELS®

DESCRIPTION	APPROX SHIP WT	CATALOG NO
12"x84" Ribbed Protectopanel®	75 lbs	559E
18"x84" Ribbed Protectopanel®	100 lbs	559A
24"x84" Ribbed Protectopanel®	130 lbs	559B
30"x84" Ribbed Protectopanel®	180 lbs	559C
36"x84" Ribbed Protectopanel®	205 lbs	559D
8"x10" Window (installed) - in panel 24" or wider		559G
10"x12" Window (installed) - in panel 30" or 36"		560G
Corner Connector (specify 30°, 45°, 60° or 90°)	20 lbs	559J
Straight Connector	20 lbs	559K
Wall Brace (Specify Length)	10 lbs	559L
Floor to Ceiling Support	10 lbs	559LA
Wall Channel for Ribbed Protectopanel®	10 lbs	559M
2" Leaded Wall Channel	15 lbs	559ML
3 Way "T" Coupling	20 lbs	559T

PROVIDE A FLOOR PLAN WITH YOUR ORDER