

# RIBBED PROTECTIVE SCREENS

## MOBILE, STATIONARY OR HINGED

**RIBBED CONSTRUCTION** for strength and rigidity


**BUILT IN LEAD GLASS WINDOW**

**ALL STEEL, LEAD LINED**

**CHOICE OF SIZES**



All of the screens below are constructed of our unique ribbed design for strength and rigidity. A lead liner of 1/16" (1.55mm) minimum thickness is centered between two steel walls for a total thickness of 7/8". Each screen has a built in 8"x10" or 10"x12" lead glass window (1.7mm. minimum, lead equivalency). The window is centered in the panel with its center 60" above the floor.

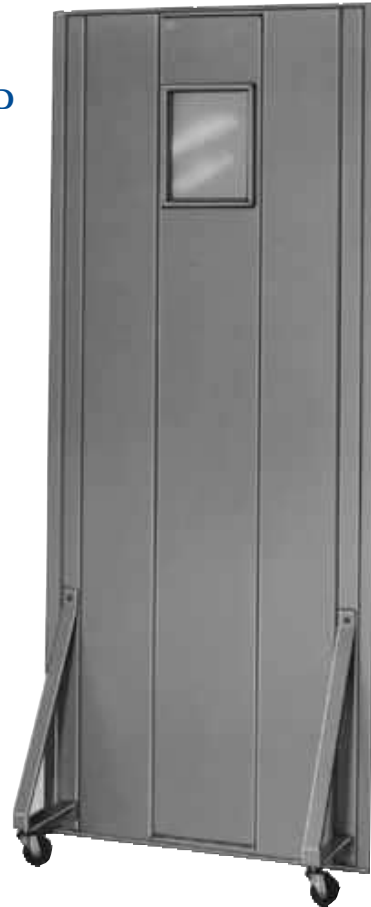

**Mobile:** Stability and ease of movement are assured by the 3/16" thick steel legs, with ball bearing casters.

**Deluxe Mobile:** Same as above but with window trim and all outer edge trim finished in polished stainless steel.

**Stationary:** For use in a fixed position. Screens are supplied with a bottom channel for fastening to the floor and a top channel with a wall mounting bracket set at 90° (unless otherwise specified).

**Hinged:** A unique pivot design allows the screen to swing aside when not in use. A ball bearing pivot assembly is built into the top and bottom of the screen. A 16" wall bracket retains the top pivot. The bottom pivot is fastened directly to the floor.

**Finish:** Light gray baked enamel

### RIBBED PROTECTIVE SCREENS

SCREEN SIZE	WINDOW SIZE	APPROX SHIP WT	CATALOG NUMBERS			
			MOBILE	DELUXE	STATIONARY	HINGED
24"x72"	8"x10"	115 lbs	554N	555N	554NS	554NH
30"x72"	8"x10"	140 lbs	554	555	554S	554H
36"x72"	8"x10"	185 lbs	554A	555A	554AS	554AH
24"x84"	8"x10"	130 lbs	554G	555G	554GS	554GH
30"x84"	8"x10"	190 lbs	554B	555B	554BS	554BH
36"x84"	8"x10"	210 lbs	554J	555J	554JS	554JH
36"x72"	10"x12"	190 lbs	554A10	555A10	554AS10	554AH10
30"x84"	10"x12"	195 lbs	554B10	555B10	554BS10	554BH10
36"x84"	10"x12"	215 lbs	554J10	555J10	554JS10	554JH10

