




ParWarmer™ Thermoprocessor™ PL-451 and PL-451A

- Softens Planet® Thermoplastic material within a few minutes
- Digital dry-heat control provides easy temperature adjustment
- Heat is contained within the closed, insulated system rather than distributed through the room
- Designed to be used with most patient thermoplastic products
- Interior Teflon surface will not stick to thermoplastic products

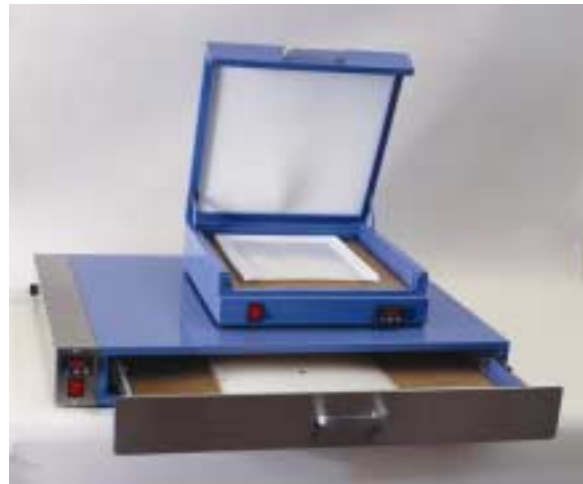

Thermoprocessors can be stacked to save space



Safe, Dry Heat

Unlike traditional, thermal water-bath heating devices, the S&S Par Scientific ParWarmer Thermoprocessor uses safe, dry heat to soften Planet thermoplastic material to its optimal elasticity. This eliminates liquid hazards and *ensures maximum comfort* during application to the patient. The dry-heat system meets today's need for universal precautions to *reduce cross-contamination* during patient care.

The **ParWarmer PL-451** heats large sheets of Planet thermoplastic material, as well as multiple U-type head frames. The sliding *drawer opens fully* to provide maximum access to the material.

The compact **ParWarmer PL-451A** heats frames up to 12x12 inches or one U-type frame. With its *small shape and easy lift lid*, the PL-451A ideally meets the needs of departments that have limited space or that require head immobilization only.

ParWarmer Thermoprocessor

PL-451 and PL-451A

PRODUCT SPECIFICATIONS

ParWarmer PL-451 (Large)

Sheet capacity18 x 24 in (45 x 60 cm)
Power Source120VAC at 60 Hz, 11 Amps
Power Cord6 ft long, 3-conductor
Ext. Dimensions.....31.125"W x 23"D x 4.437"H
Weight.....45 lbs., 99.2 Kg
Finish.....Blue enamel with stainless steel trim

ParWarmer PL-451A (Compact)

Sheet capacity12 x 12 in (30.5 x 30.5 cm)
Power Source120VAC at 60 Hz, 4 Amps
Power Cord6 ft long, 3-conductor
Ext. Dimensions.....15"W x 15.25"D x 4.75"H (20"H, with lid raised)
Weight.....15 lbs., 33 Kg
Finish.....Blue enamel with stainless steel trim



10625 Telge Road, Houston, TX 77095
(800) 231-1747 • Fax (281) 815-1444